

Product Information


DT Accessories DT-IPC



DESCRIPTION

2-wire system IP converter


DIMENSION

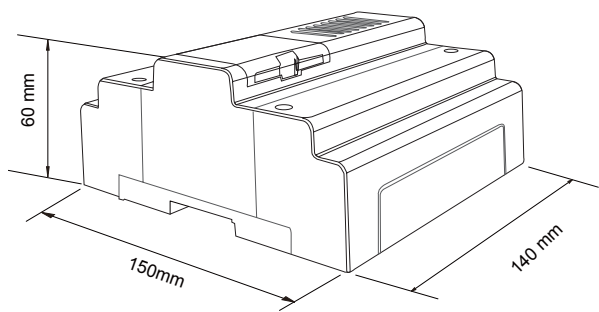

FEATURES


- ▶ Only one DT-IPC is required in one block.
- ▶ Built-in watchdog circuit in case of crash.
- ▶ LED Indicators to show system status
- ▶ RJ45 Standard connection port
- ▶ IP address setting & store
- ▶ Talking volume adjustable
- ▶ Support TCP/IP network and fiber transmission or broadhand network access.
- ▶ Adopt MPEG4 video protocol and G.729 audio protocol.
- ▶ Include 100Mbit Ethernet LAN and RS485 connection port.

1. Parts and Functions

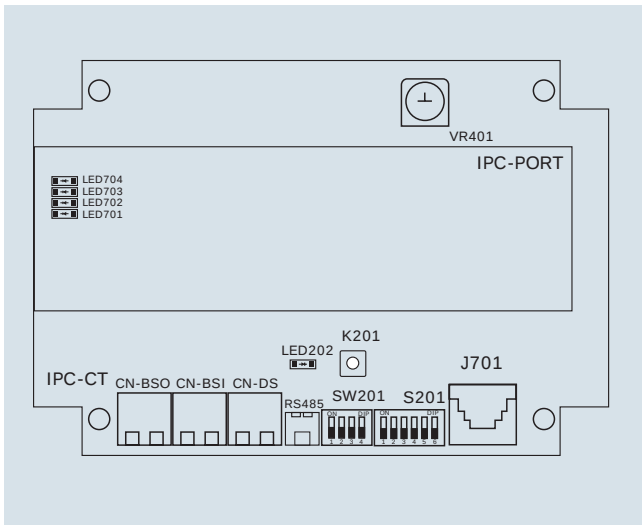


- **LED202:** Power on for 10s, it will flicker
- **LED701:** Network connection indicator
- **LED702:** Audio indicator
- **LED703:** Video indicator
- **LED704:** Communication indicator
- **SW201:** DIP switches
- **S201:** DIP switches
- **J701:** RJ45 connection port, connected to LAN
- **CN-BSO:** 2 wire terminal connection, output port
- **CN-BSI:** 2 wire terminal connection, input port
- **CN-DS:** Connected to door station
- **K201:** Reserve
- **VR401:** Adjust the volume
- **RS485:** Set parameters of DT-IPC by PC that is connected by RS485-USB Converter

2. Unit Mounting

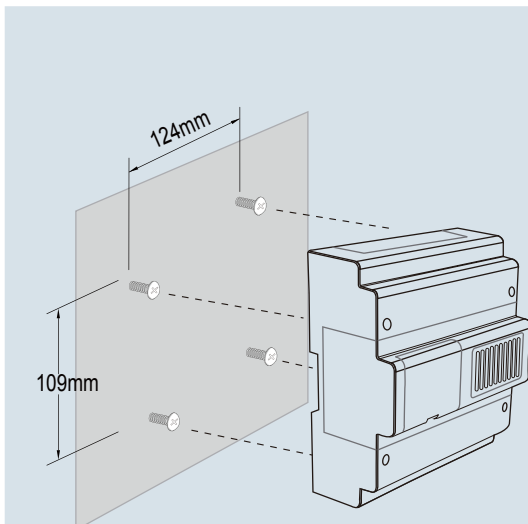

Direct Wall Mounting

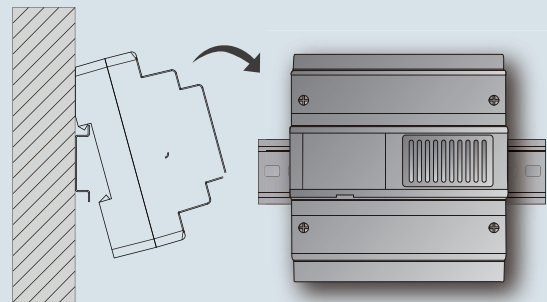

DIN Rail Mounting

3. Specification

- * Power Supply : DC 24V;
- * Power Consumption: Standby 158mA; Working status 250mA;
- * Network Interface: Standard Ethernet interface;
- * Connection Port: RJ45;
- * Temperature: -10⁰C~+40⁰C;
- * Wiring: 2 wires (non-polarity);
- * Dimension: 138(H)×151(W)×66(D)mm

4. Ordering Information

Model No.	Brief Description	Remark
DT-IPC	IP Converter	IP network solution

5. Packing Information



Dimensions: 153(H) X148(W) X68(D) mm
Gross Weight: 0.5Kg



Carton: 495(H) X403(W) X310(D) mm
Quanlity: 30PCS